

Indigo™ Series 450 Ice Cube Machine

Model: ☐ ID-0452A ☐ IY-0454A ☐ ID-0453W ☐ IY-0455W



Indigo Series i-450
Ice Machine on B-400 Bin

Designed for operators who know that ice is critical to their business, the Indigo™ Series ice machine's preventative diagnostics continually monitor itself for reliable ice production. Improvements in cleanability and programmability make your ice machine easy to own and less expensive to operate.

- **Space-Saving Design** – Up to 450 lbs. (204 kgs.) daily ice production and only 30" (76.20 cm) wide.
- **Intelligent Diagnostics** – provide 24 hour preventative maintenance and diagnostic feedback for trouble free operation.
- **Acoustical Ice Sensing Probe** – for reliable operation in challenging water conditions.
- **EasyRead Display** – communicates operating status, cleaning reminders, and asset information through a blue illuminated display.
- **Programmable Ice Production** – by On/Off Time, Ice Volume or Bin Level (with accessory bin level control) further improves energy efficiency and savings.
- **Easy to Clean Foodzone** – Hinged front door swings out for easy access. Removable water-trough, distribution tube, curtain, and sensing probes for fast and efficient cleaning. Select components made with AlphaSan® antimicrobial.
- **DuraTech™ Exterior** – provides superior corrosion resistance. Stainless finish with innovative clear-coat resists fingerprints and dirt.
- Available **LuminIce™ Growth Inhibitor** controls the growth of bacteria and yeast within the foodzone.

Ice Machine Electric

115/60/1 standard.
(208-230/60/1 and 230/50/1 also available)

Minimum circuit ampacity:

Air-cooled: 13.2
Water-cooled: 12.5

Maximum fuse size:

20 amps 1ph

Specifications

BTU Per Hour:

5,400 (average) 6,300 (peak)

Refrigerant:

R-404A CFC-free

Operating Limits:

- Ambient Temperature Range: 35° to 110°F (1.7° to 43.3°C)
Water Temperature Range: 35° to 90°F (1.7° to 32.2°C)
- Water Pressure Ice Maker Water In:
Min. 20 psi (137.9 kPa)
Max. 80 psi (551.1 kPa)



Ice Shape



Half Dice
3/8" x 1 1/8" x 7/8"
(.95 x 2.86 x 2.22 cm)



Dice
7/8" x 7/8" x 7/8"
(2.22 x 2.22 x 2.22 cm)






Indigo™ Series 450 Ice Cube Machine

i-450 on B-400 Storage Bin

Installation Note

Minimum installation clearance:

Top/sides: 8" (20.32 cm);
Back is 5" (12.7 cm)

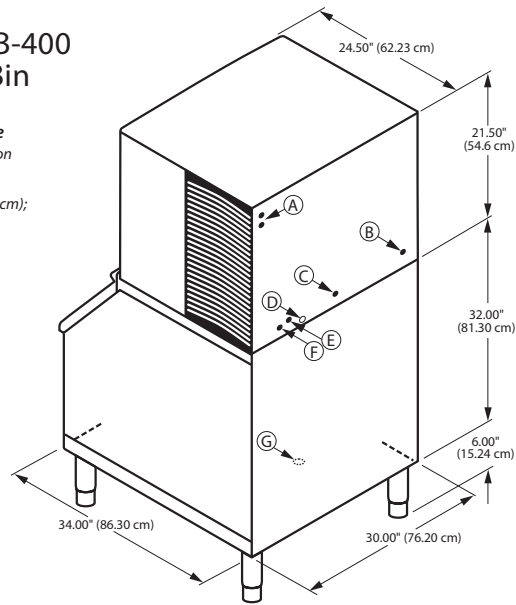

- (A) Electrical Entrance (2) Options
(B) 3/8" (0.95 cm) F.P.T. Water Condenser Inlet (water-cooled units)
(C) 1/2" (1.27 cm) F.P.T. Water Condenser Outlet (water-cooled units)
(D) 1/2" (1.27 cm) Auxiliary Base Drain Socket
(E) 3/8" (0.95 cm) F.P.T. Ice Making Water Inlet
(F) 1/2" (1.27 cm) F.P.T. Ice Making Water Drain
(G) 3/4" (1.91 cm) Bin Drain

Space-Saving Designs



	i-450 B-400	i-450 B-570
Height	59.50" 151.13 cm	71.50" 181.61 cm
Width	30.00" 76.20 cm	30.00" 76.20 cm
Depth	34.00" 86.30 cm	34.00" 86.30 cm
Bin Storage	290 lbs. 131.7 kgs.	430 lbs. 195.2 kgs.

Height includes adjustable bin legs 6.00" to 8.00",
(15.24 to 20.32 cm) set at 6.00" (15.24 cm).

Specifications

	Model	Ice Shape	Ice Production 24 Hours		Power Usage kWh/100 lbs. @90° Air/70°F	Water Usage/ 100 lbs. 45.4 kgs. of Ice	ENERGY STAR®
			70° Air/ 50°F Water	90° Air/ 70°F Water		Potable Water	
AIR-COOLED	ID-0452A	dice	420 lbs. 191 kgs.	320 lbs. 145 kgs.	6.24	24.4 Gal. 92.4 L	★
	IY-0454A	half-dice	450 lbs. 204 kgs.	335 lbs. 152 kgs.	5.97	24.4 Gal. 92.4 L	★
WATER-COOLED	ID-0453W	dice	430 lbs. 195 kgs.	360 lbs. 163 kgs.	4.70	24.4 Gal. 92.4 L	NA
	IY-0455W	half-dice	450 lbs. 204 kgs.	360 lbs. 163 kgs.	4.70	24.4 Gal. 92.4 L	NA

* Water-cooled Condenser Water Usage / 100 lbs. /45.4 kgs. Of Ice: 169 gal/640 L.

* Water-cooled models are excluded from ENERGY STAR qualification.

Order ice storage bin separately.

Accessories

**LuminIce™
Growth Inhibitor**
reduces yeast and
bacteria growth for a
cleaner ice machine.



Bin Level Control
Allows ice bin level
to be automatically
set. Built-in LED light
illuminates bin.



**Arctic Pure®
Water Filters**
Reduces
sediment and
chlorine odors for
better tasting ice.



AuCSe®
schedules and
performs routine ice
machine cleaning
automatically.

