



# **Indigo™ Series** 606 Ice Cube Machine

Model: | ID-0606A | IY-0606A | ID-0606W | IY-0606W | ID-0696N | IY-0696N

### Ice Machine Electric

208-230/60/1 standard. (230/50/1 also available)

## Minimum circuit ampacity:

Air Cooled: 11.1 Water Cooled: 10.7 Remote: 11.7

### Maximum fuse size:

Indigo Series i-606

Ice Machine on B-570 Bin

Air Cooled: 15 Water Cooled: 15 Remote: 15

## **Specifications**

#### **BTU Per Hour:**

11,800 (average) 13,700 (peak)

#### Refrigerant:

R-404A CFC-free

#### **Operating Limits:**

- **Ambient Temperature Range:** 35° to 110°F (1.7° to 43.3°C) Water Temperature Range: 35° to 90°F (1.7° to 32.2°C)
- Water Pressure Ice Maker Water In: Min. 20 psi (137.9 kPA) Max. 80 psi (551.1 kPA)

Designed for operators who know that ice is critical to their business, the Indigo™ Series ice machine's preventative diagnostics continually monitor itself for reliable ice production. Improvements in cleanability and programmability make your ice machine easy to own and less expensive to operate.

- New Levels of Performance showcasing improved ambient ice production along with reductions in energy consumption: 10% Reduction in energy and 5% improvement in production on a weighted average basis for the i-600 series.
- ENERGY STAR the i-600s exceeds ENERGY STAR™ standards and targets future energy efficiency standards.
- Space-Saving Design Up to 635 lbs. (288 kgs) daily ice production and only 30" (76.20 cm) wide.
- Intelligent Diagnostics provide 24 hour preventative maintenance and diagnostic feedback for trouble free operation.
- Acoustical Ice Sensing Probe for reliable operation in challenging water conditions.
- EasyRead Display communicates operating status, cleaning reminders, and asset information through a blue illuminated
- Programmable Ice Production by On/Off Time, Ice Volume or Bin Level (with accessory bin level control) further improves energy efficiency and savings.
- Easy to Clean Foodzone Hinged front door swings out for easy access. Removable water-trough, distribution tube, curtain, and sensing probes for fast and efficient cleaning. Select components made with AlphaSan® antimicrobial.
- DuraTech™ Exterior provides superior corrosion resistance. Stainless finish with innovative clear-coat resists fingerprints
- Available LuminIce™ Growth Inhibitor controls the growth of bacteria and yeast within the foodzone.



## Ice Shape



**Half Dice** (.95 x 2.86 x 2.22 cm)



Dice %" x %" x %"














QUALITY MANAGEMENT SYSTEM : ISO 9001:2008 =

2110 South 26th Street PO Box 1720 Manitowoc, WI 54221-1720 USA Tel: 1.920.682.0161 Fax: 1.920.683.7589 www.manitowocice.com







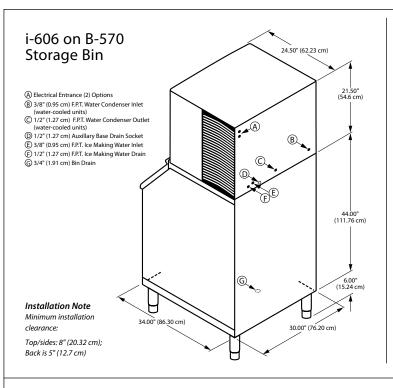

## Space-Saving Designs





	i-606 B-400	i-606 B-570		
Height	59.50" 151.13 cm	71.50" 181.61 cm		
Width	30.00" 76.20 cm	30.00" 76.20 cm		
Depth	34.00" 86.30 cm	34.00" 86.30 cm		
Bin Storage	290 lbs. 131.7 kgs	430 lbs. 195.2 kgs		

Height includes adjustable bin legs 6.00" to 8.00", (15.24 to 20.32 cm) set at 6.00" (15.24 cm).

## Specifications

			Ice Production 24 Hours		Power Usage kWh/100 lbs. @90°Air/70°F Potable Water		
	Model	Ice Shape	70°Air/ 50°F Water 21° Air/10°C Water	90°Air/ 70°F Water 32° Air/21°C Water	1 Ph	Usage/100 lbs. 45.4 kgs of Ice	ENERGY STAR*
AIR-COOLED	ID-0606A	dice	632 lbs.	490 lbs.	5.41	20.0 Gal.	*
			287 kgs	222 kgs		75.7 L	
	IY-0606A half-dice	half-dice	635 lbs.	555 lbs.	5.29	20.0 Gal.	*
			288 kgs	252 kgs		75.7 L	
WATER-COOLED	ID-0606W dic	dice	661 lbs.	575 lbs.	4.44	20.0 Gal.	NA
			300 kgs	261 kgs		75.7 L	
	lY-0606W half-dice	half-dice	700 lbs.	580 lbs.	4.45	20.0 Gal.	- NA
Ë	11-00000		318 kgs	263 kgs		75.7 L	
×	* Water-cooled Condenser Water Usage / 100 lbs. /45.4 kgs Of Ice: 140 gal./ 530 L.  * Water-cooled models are excluded from ENERGY STAR qualification.						
REMOTE- COOLED	ID-0696N dice	612 lbs.	535 lbs.	5.85	20.0 Gal.		
			278 kgs	243 kgs	3.83	75.70 L	*
	IY-0696N half-dice	642 lbs.	565 lbs.	5.76	20.0 Gal.		
		*	291 kgs	256 kgs	3.70	75.7 L	*

Order ice storage bin separately. Ice storage bin and JC-0895 remote condenser must be ordered separately. Consult remote condenser specification sheet for details.

#### Accessories

#### LuminIce™ **Growth Inhibitor** reduces yeast and bacteria growth for a cleaner ice machine.



**Bin Level Control** Allows ice bin level to be automatically set. Built-in LED light illuminates bin.



**Arctic Pure® Water Filters** Reduces

sediment and chlorine odors for better tasting ice.



iAuCS® schedules and performs routine ice machine cleaning automatically.



2110 South 26th Street PO Box 1720 Manitowoc, WI 54221-1720 USA Tel: 1.920.682.0161 Fax: 1.920.683.7589 www.manitowocice.com





4770C ©2012 Manitowoc 5/12 Continuing product improvement may necessitate change of specifications without notice