

PROJECT	QUANTITY	ITEM NO
---------	----------	---------

Heated holding cabinet

Modular countertop

MODEL **MP-941** single-drawer
MP-942 two-drawer
MP-943 three-drawer
MP-944 four-drawer



Modular countertop heated holding cabinet, model MP-941 with single drawer and slide vent humidity control.



Four-drawer model MP-944. Single drawer units can be combined into two, three or four-drawer units.

General Information

Henny Penny heated holding cabinets are designed to hold a wide range of cooked foods at safe temperatures for long periods of time prior to serving.

The MP-941 is a single drawer, modular unit that can be placed on countertops, side by side or stacked, or mounted under countertops. Multi-drawer units allow separate side-by-side holding environments that can be programmed independently with temperatures for each drawer. Rear panel outlets allow multiple single

drawer units to be conveniently powered from one electrical source.

With longer holding periods, operators can cook ahead of time and serve on demand during peak periods. The compact modular design gives operators great flexibility in how single or multiple holding units can be set up to be accessible for servers without interrupting work flow.

Units are welded stainless steel. Drawers and liners are single piece welded stainless steel construction and roll smoothly on tough Rulon® slide bearings. Drawers close completely and seal against high-temperature gaskets.

Cabinets are fully insulated for energy efficient operation.

Control panel features easy-to-read LED temperature display and built-in digital clock.

Standard Features

- Durable, welded stainless steel construction.
- Single piece welded drawer and liner.
- Fully insulated cabinet.
- Snug-fitting drawers on tough, low-friction Rulon bearings.
- Positive drawer closure.
- High temperature drawer gasket.
- Electronic temperature control with four-digit display in °F or °C.
- Built-in digital clock.
- Programmable temperature input with program lock to prevent accidental changes in settings.
- Energy efficient operation.
- Slide vent humidity control, each drawer.
- Accepts standard steam table pans.
- Adjustable leveling feet (available on MP-941 only.)
- Single and 3-drawer units have rear-mounted power cords.
- Two and 4-drawer units have side-mounted power cords.
- Choice of right or left-side control panel (MP-941 right side only.)

Please specify desired control location for 2, 3 and 4-drawer units:

- ☐ Right side OR
☐ Left side

<input type="checkbox"/> APPROVED	<input type="checkbox"/> APPROVED AS NOTED	<input type="checkbox"/> RESUBMIT
AUTHORIZED SIGNATURE		DATE



Henny Penny Corporation
PO Box 60 Eaton OH 45320 USA


+1 937 456.8400 800 417.8417
+1 937 456.8434 Fax 800 417.8434 Fax

www.hennypenny.com

Heated holding cabinet

Modular countertop

MODEL **MP-941** single-drawer
MP-942 two-drawer
MP-943 three-drawer
MP-944 four-drawer

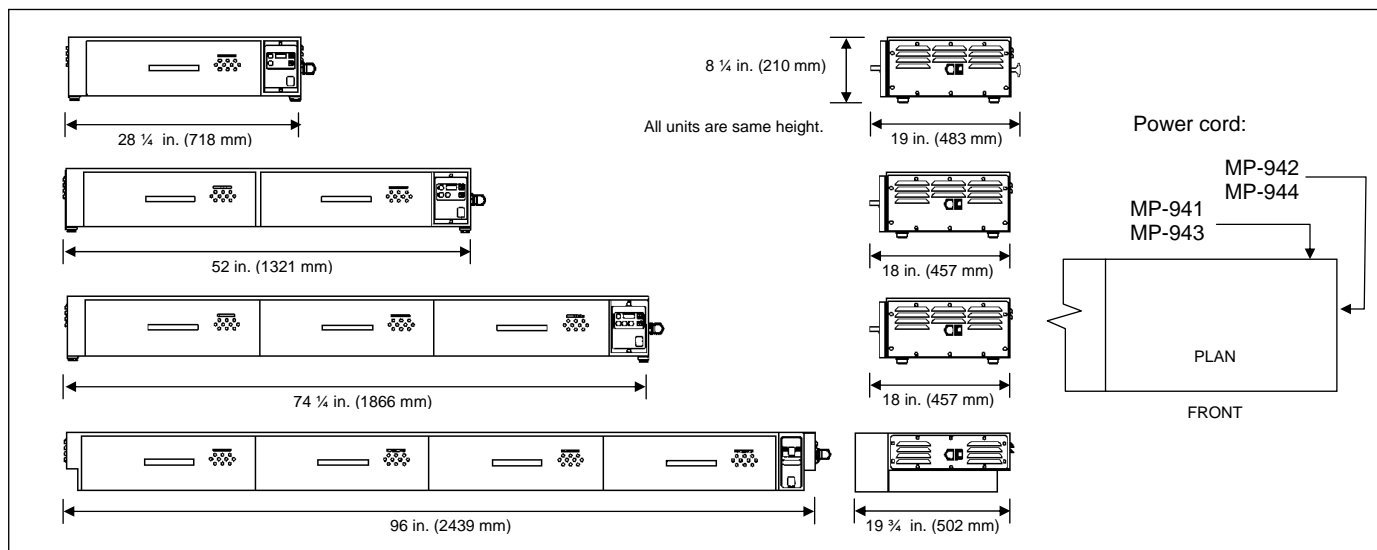

Dimensions

	MP-941	MP-942	MP-943	MP-944
Height:	8 1/4 in. (210 mm)	8 1/4 in. (210 mm)	8 1/4 in. (210 mm)	8 1/4 in. (210 mm)
Width:	28 1/4 in. (718 mm)	52 in. (1321 mm)	74 1/4 in. (1866 mm)	96 in. (2439 mm)
Depth:	19 in. (483 mm)	18 in. (457 mm)	18 in. (457 mm)	19 3/4 in. (502 mm)

Laboratory certifications



Crated dimensions

Length:	32 1/2 in. (826 mm)	54 3/4 in. (1391 mm)	77 in. (1956 mm)	99 in. (2515 mm)
Depth:	19 1/2 in. (495 mm)	21 1/2 in. (546 mm)	20 1/4 in. (514 mm)	20 1/4 in. (514 mm)
Height:	10 in. (254 mm)	12 1/4 in. (311 mm)	12 1/4 in. (311 mm)	12 1/4 in. (311 mm)
Volume:	3.7 cu.ft. (0.10 m ³)	8.3 cu.ft. (0.23 m ³)	11.1 cu.ft. (0.31 m ³)	14.2 cu.ft. (0.40 m ³)

Required clearances

Control side: 2 in. (51 mm) for side power cord on MP-942, MP-944
 Back: 2 in. (51 mm) for rear power cord on MP-941, MP-943

Crated weight

MP-941 single drawer:	67 lb. (30 kg)
MP-942 two-drawer:	139 lb. (63 kg)
MP-943 three-drawer:	200 lb. (91 kg)
MP-944 four-drawer:	278 lb. (126 kg)

Heating: Thermostat controlled, 160-210°F (71-99°C)

Capacity

One steam table pan 12 x 20 x 4 in (305 x 508 x 102 mm) per drawer

Electrical

Model	Volts	Phase	Cycle/Hz	Watts	Amps	Wire
MP-941	120	1	50/60	475	3.9	2+G
	230	1	50	475	2.1	1NG
MP-942	120	1	50/60	950	7.9	2+G
	230	1	50	950	4.1	1NG
MP-943	120	1	50/60	1400	11.7	2+G
	230	1	50	1400	6.1	1NG
MP-944	120	1	50/60	1900	15.8	2+G
	230	1	50	1900	8.3	1NG

Bidding Specifications

- Provide Henny Penny 940 Series modular countertop heated holding cabinet as Model MP-941 single drawer, MP-942 two-drawer, MP-943 three-drawer or MP-944 four-drawer. Single drawer units are assembled side-to-side to form multi-drawer models. Units are designed to hold varying quantities of hot foods at safe temperatures in separate environments.
- Cabinet exterior is constructed of high-quality, welded stainless steel. Drawer and liner are single piece, welded stainless steel. Drawer rolls on durable Rulon® bearings.
- Cabinet is fully insulated and features high-temperature drawer gasket and positive closure.
- Unit shall be equipped with programmable temperature controls.
- Provide choice of right-hand or left-hand controls for multi-drawer configurations.
- Models MP-941 shall include adjustable leveling feet.

Continuing product improvement may subject specifications to change without notice.

HENNY PENNY
 Global Foodservice Solutions

www.hennypenny.com