

RANGE COMPOSITION

EVO900: a range designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected throughout the line in its modularity, construction and numerous configurations: countertop (on base or table), free-standing, on concrete or stainless steel plinth, bridged or cantilever. Thanks to its advanced technology and premium performance, EVO900 is a perfect solution for restaurants as well as large institutions needing high power and high productivity. The models detailed in this sheet are 2 electric ranges with 4 hot plates on an electric oven.



392041

EVO900

ELECTRIC RANGES **ZANUSSI** PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ The electric range is ideal for kitchens needing a flexible, powerful and easy to clean cooking top.
- ◆ Cast-iron hot plates hermetically sealed to the one-piece top, with safety thermostat.
- ◆ Hot plates with a power of 4 kW.
- ◆ Electric oven with switch knob to control top and bottom heating elements. Oven thermostat with temperature markings in °C adjustable from 110° to 285°C and power of 6 kW.
- ◆ Worktop in 20/10 stainless steel. Front and side panels in stainless steel with Scotch Brite finish.
- ◆ All models have right-angled side edges to allow flush-fitting joins between units, eliminating gaps and possible dirt traps.
- ◆ Stainless steel oven chamber with 3 levels of runners to accommodate 2/1GN shelves; ribbed, cast-iron oven base plate.
- ◆ Inside door panel in stainless steel.
- ◆ Recessed, double skinned, insulated door.
- ◆ Stainless steel feet adjustables up to a height of 50 mm.
- ◆ The special design of the control knob

system guarantees against water infiltration.




- ◆ Main connections can be via the base of the unit.
- ◆ All models provided with service duct to ease installation.
- ◆ All models can be installed on cantilever system.
- ◆ IPX5 water protection.

TECHNICAL DATA		
CHARACTERISTICS	MODELS	
	Z9ECEH4QE0 392041	Z9ECEH4QEN 392167
Power supply	Electric	Electric
External dimensions - mm		
width	800	800
depth	900	900
height	850	850
height adjustment	50	50
Oven cavity - mm		
width	575	575
depth	700	700
height	300	300
Oven		
heat input - kW	6	6
temperature min-max - °C	110, 285	110, 285
Back plate dimensions - mm	300x300, 300x300	300x300, 300x300
Back plates power - kW	4, 4	4, 4
Front plates dimension - mm	300x300, 300x300	300x300, 300x300
Front plates power - kW	4, 4	4, 4
Total Power - kW	22	22
Net weight - kg.	145	145
Supply voltage	400 V, 3N, 50/60	230 V, 3, 50/60
INCLUDED ACCESSORIES		
2/1 GN CHROME GRID	1	1

OPTIONAL ACCESSORIES		
ACCESSORIES	MODELS	
	Z9ECEH4QE0 392041	Z9ECEH4QEN 392167
2 CAST IRON PLATE BARS - EL.COOK.TOP-900	206056	206056
2 PANELS FOR SERVICE DUCT (BACK TO BACK)	206202	206202
2 PANELS FOR SERVICE DUCT (SINGLE INST.)	206181	206181
2 SIDE COVERING PANELS H=700-D=900-Z/OEM	206335	206335
2 SIDE KICKING STRIPS - 900 LINE	206180	206180
2 SIDE KICKING STRIPS-CONCRETE INST-900	206157	206157
2/1 GN CHROME GRID	164250	164250
4 FEET FOR CONCRETE INSTALLATION	206210	206210
4 WHEELS (2 WITH BRAKE)	206188	206188
CHIMNEY UPSTAND 800MM	206304	206304
FLANGED FEET KIT	206136	206136
FRONT.KICK.STRIP F.CONCRETE INST.1000 MM	206150	206150
FRONT.KICK.STRIP F.CONCRETE INST.1200 MM	206151	206151
FRONT.KICK.STRIP F.CONCRETE INST.1600 MM	206152	206152
FRONT.KICK.STRIP F.CONCRETE INST.800 MM	206148	206148
FRONTAL HANDRAIL 1200 MM	206191	206191
FRONTAL HANDRAIL 1600 MM	206192	206192
FRONTAL HANDRAIL 400 MM	206166	206166
FRONTAL HANDRAIL 800 MM	206167	206167
FRONTAL KICKING STRIP 1000 MM	206177	206177
FRONTAL KICKING STRIP 1200 MM	206178	206178
FRONTAL KICKING STRIP 1600 MM	206179	206179
FRONTAL KICKING STRIP 800 MM	206176	206176
JUNCTION SEALING KIT	206086	206086
LARGE HANDRAIL(PORTIONING SHELF)400 MM	206185	206185
LARGE HANDRAIL(PORTIONING SHELF)800 MM	206186	206186
SIDE HANDRAIL-RIGHT/LEFT HAND-900 LINE	206165	206165
WATER COLUMN EXTENSION FOR 900 LINE	206290	206290
WATER COLUMN WITH SWIVEL ARM	206289	206289



www.zanussiprofessional.com

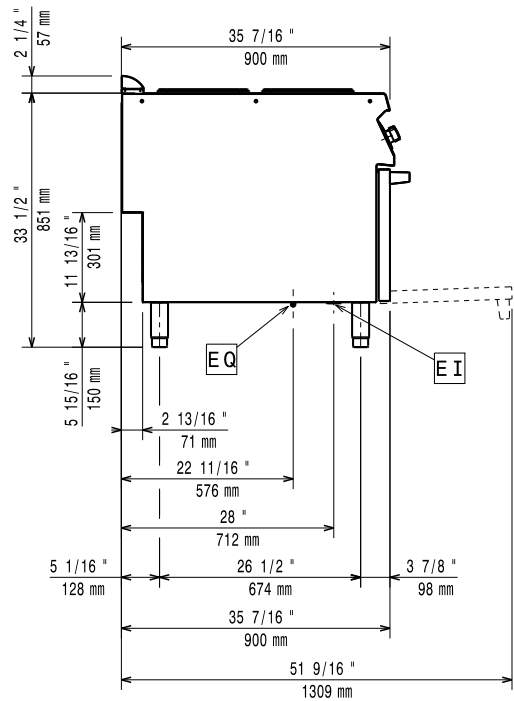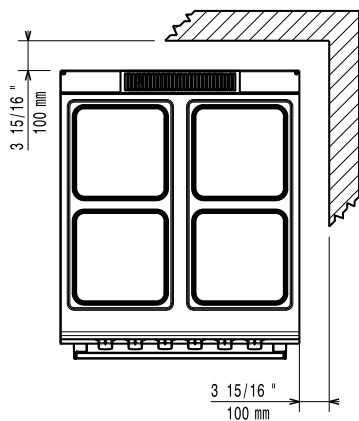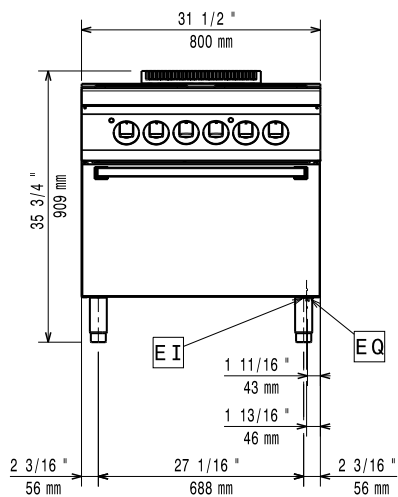

597858T00

LEGEND

	Z9ECEH4QE0 392041	Z9ECEH4QEN 392167
EI - Electrical connection	400 V, 3N, 50/60	230 V, 3, 50/60