

## RANGE COMPOSITION

EVO900: a range designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected throughout the line in its modularity, construction and numerous configurations: countertop (on base or table), free-standing, on concrete or stainless steel plinth, bridged or cantilever. Thanks to its advanced technology and premium performance, EVO900 is a perfect solution for restaurants as well as large institutions needing high power and high productivity. The models detailed in this sheet are 4 induction plate tops available in half or full module versions and with different voltages.



392043

# EVO900

## INDUCTION COOK TOPS **ZANUSSI** PROFESSIONAL

### FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ The induction cooking top provides a powerful, fast, efficient and easy to clean solution for all cooking needs. Induction technology allows the heat to be transferred exclusively to the bottom of the pot or pan thus reducing heat dispersion to the working environment.
- ◆ Worktop in 20/10 stainless steel. Front, side and back panels in stainless steel with Scotch Brite finish.
- ◆ Ceran® glass ceramic cooking surface 6 mm thick.
- ◆ 4 independently controlled induction zones with diameter 280 mm and power 5 kw allowing very low cooking times and avoiding heating dispersions.
- ◆ Cooking zones are activated only when in direct contact with pans that are specific for induction plates. The cooking zone not in contact with a



pan is not activated and remains cold.

- ◆ Induction zones equipped with overheating safety device which protects the appliance from any damage that may be provoked by an overheating of the inductors (ex. when using the appliance with pots/pans that have little or no food in them).
- ◆ Digital control panel with 9 different levels of power, allowing an easy and precise cooking. Ideal for cooking delicate foods.
- ◆ All top models are provided with a service duct to facilitate installation

and can be easily mounted on table tops, refrigerated bases, open base cupboards, bridging supports or cantilever supports.

- ◆ Main connections can be via the rear of the unit.
- ◆ Right-angled, laser cut side edges to allow for the flush-fitting of units side-by-side thus eliminating gaps and possible dirt traps.
- ◆ Access to all components from the front.
- ◆ Colored leds located on control console to indicate when each zone is in function.
- ◆ IPX5 water protection.

TECHNICAL DATA				
CHARACTERISTICS	MODELS			
	Z9INED2000 392042	Z9INEH4000 392043	Z9INED200N 392168	Z9INEH400N 392169
Power supply	Electric	Electric	Electric	Electric
External dimensions - mm				
width	400	800	400	800
depth	900	900	900	900
height	250	250	250	250
Back plate dimensions - mm	Ø 280	Ø 280, Ø 280	Ø 280	Ø 280, Ø 280
Back plates power - kW	5	5, 5	5	5, 5
Front plates dimension - mm	Ø 280	Ø 280, Ø 280	Ø 280	Ø 280, Ø 280
Front plates power - kW	5	5, 5	5	5, 5
Net weight - kg.	40	75	40	75
Supply voltage	400 V, 3, 50/60	400 V, 3, 50/60	230 V, 3, 50/60	230 V, 3, 50/60

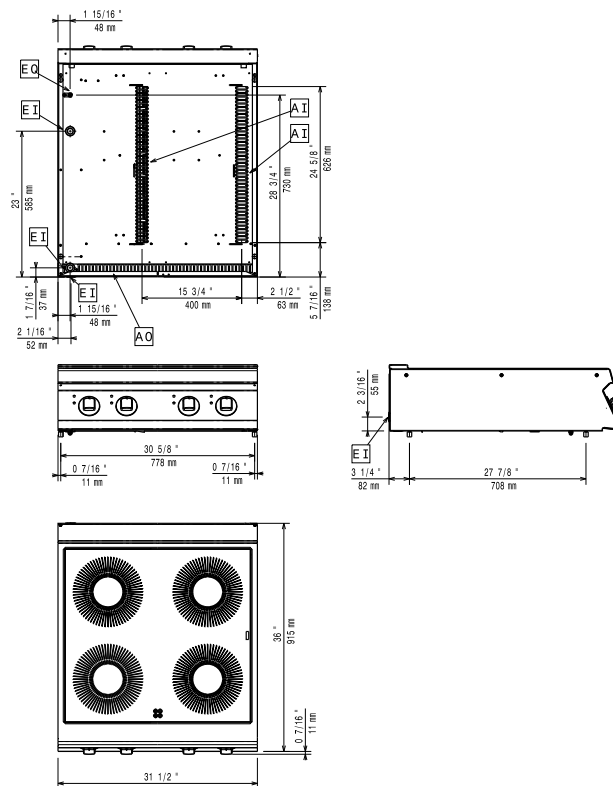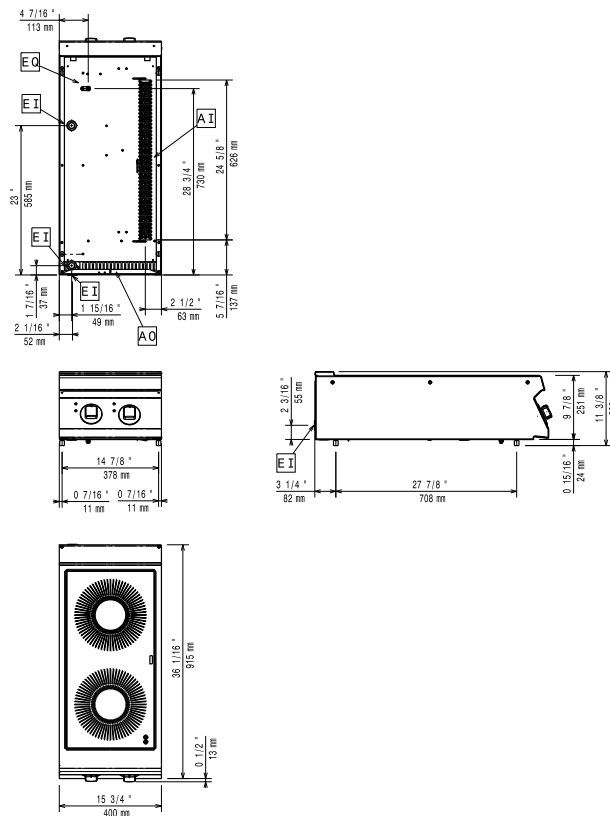

## LEGEND

	Z9INED2000 392042	Z9INEH4000 392043	Z9INED200N 392168	Z9INEH400N 392169
EI - Electrical connection	400 V, 3, 50/60	400 V, 3, 50/60	230 V, 3, 50/60	230 V, 3, 50/60

## OPTIONAL ACCESSORIES

ACCESSORIES	MODELS			
	Z9INED2000 392042	Z9INEH4000 392043	Z9INED200N 392168	Z9INEH400N 392169
2 SIDE COVERING PANELS H=250-D=900-Z/OEM	206321	206321	206321	206321
CHIMNEY UPSTAND 400MM	206303		206303	
CHIMNEY UPSTAND 800MM		206304		206304
FRONTAL HANDRAIL 1200 MM	206191	206191	206191	206191
FRONTAL HANDRAIL 1600 MM	206192	206192	206192	206192
FRONTAL HANDRAIL 400 MM	206166	206166	206166	206166
FRONTAL HANDRAIL 800 MM	206167	206167	206167	206167
INDUCTION PAN+S/S HANDLE D=240MM	653597	653597		
INDUCTION PAN+S/S HANDLE D=280MM	653598	653598		
JUNCTION SEALING KIT	206086	206086	206086	206086
LARGE HANDRAIL(PORTIONING SHELF)400 MM	206185	206185	206185	206185
LARGE HANDRAIL(PORTIONING SHELF)800 MM	206186	206186	206186	206186
S/S INDUCTION PAN+S/S HANDLE D=200MM	653596	653596		
SIDE HANDRAIL-RIGHT/LEFT HAND-900 LINE	206165	206165	206165	206165
SUPPORT FOR "BRIDGE" SYSTEM 1000 MM	206138	206138	206138	206138
SUPPORT FOR "BRIDGE" SYSTEM 1200 MM	206139	206139	206139	206139
SUPPORT FOR "BRIDGE" SYSTEM 1400 MM	206140	206140	206140	206140
SUPPORT FOR "BRIDGE" SYSTEM 1600 MM	206141	206141	206141	206141
SUPPORT FOR "BRIDGE" SYSTEM 400 MM	206154		206154	
SUPPORT FOR "BRIDGE" SYSTEM 800 MM	206137	206137	206137	206137
WATER COLUMN EXTENSION FOR 900 LINE	206290	206290	206290	206290
WATER COLUMN WITH SWIVEL ARM	206289	206289	206289	206289



www.zanussiprofessional.com