

RANGE COMPOSITION

N 900: a range designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected throughout the line in its modularity, construction and numerous configurations: countertop (on base or table), free-standing, on concrete or stainless steel plinth, bridged or cantilever. Thanks to its advanced technology and premium performance, N 900 is a perfect solution for restaurants as well as large institutions needing high power and high productivity. The models detailed in this sheet are 15 litres fryers in electric version.



392088

EV0900

ELECTRIC FRYERS - 15 LT ZANUSSI PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ The electric fryer with V-Shaped well is ideal for kitchens needing a versatile, efficient and easy to clean unit capable of cooking numerous portions time after time. The V-Shaped well is equipped with high efficiency external infrared heating elements guaranteeing a longer oil life (compared to fryers with heating elements inside the well) as well as a uniform distribution of heat
- ◆ Deep drawn V-Shaped well with rounded corners and external heating elements for safe and easy cleaning.
- ◆ The V-Shaped well is made from two pieces of pressed stainless steel that are seamlessly welded together for maximum hygiene, safety and reliability.
- ◆ Working temperature from 105°C to 185°C.
- ◆ All models have right-angled side edges to allow flush-fitting joints between units, eliminating gaps and possible dirt traps.
- ◆ Additional overheat safety thermostat.
- ◆ Worktop in 20/10 stainless steel. Front and side panels in stainless steel with Scotch Brite finish.
- ◆ Oil drainage via a tap into a drainage container positioned under the well thus simplifying the consumed oil management


and guaranteeing the operator safety.

- ◆ Feet in stainless steel 50 mm adjustables in height.
- ◆ All models can be installed on cantilever system.
- ◆ The special design of the control knobs and bezels guarantees against water infiltration
- ◆ Main connections can be via the base of

the unit.

- ◆ All models provided with service duct to facilitate installation.

TECHNICAL DATA		
CHARACTERISTICS	MODELS	
	Z9FRED1GF0 392087	Z9FREH2GF0 392088
Power supply	Electric	Electric
External dimensions - mm		
width	400	800
depth	900	900
height	850	850
height adjustment	50	50
N° of wells	1	2
Usable well dimensions - mm		
width	240	240
depth	380	380
height	505	505
Thermostatic	●	●
Temperature limiter	●	●
Maximum Well Capacity -lt	13, 15	13, 15
Power - kW		
installed-electric	10	20
Net weight - kg.	50	86
Supply voltage	400 V, 3N, 50/60	400 V, 3N, 50/60
INCLUDED ACCESSORIES		
BASKET FOR 14/15 LT FRYERS	1	2
DOOR FOR OPEN BASE CUPBOARD-ZANUSSI	1	2

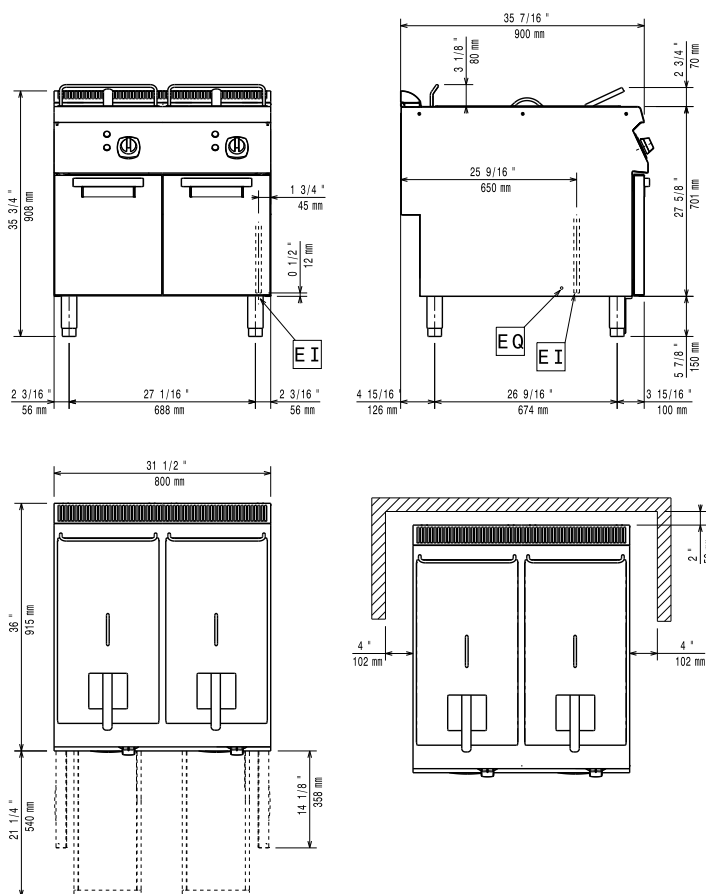

LEGEND

EI - Electrical connection

Z9FRED1GF0
392087

400 V, 3N, 50/60

Z9FREH2GF0
392088

400 V, 3N, 50/60

OPTIONAL ACCESSORIES
ACCESSORIES

MODELS

Z9FRED1GF0

Z9FREH2GF0

392087

392088

2 1/2 BASKETS FOR 12, 14 AND 15L FRYERS

921692

921692

2 PANELS FOR SERVICE DUCT (BACK TO BACK)

206202

206202

2 PANELS FOR SERVICE DUCT (SINGLE INST.)

206181

206181

2 SIDE COVERING PANELS H=700-D=900-Z/OEM

206335

206335

2 SIDE KICKING STRIPS - 900 LINE

206180

206180

2 SIDE KICKING STRIPS-CONCRETE INST-900

206157

206157

4 FEET FOR CONCRETE INSTALLATION

206210

206210

4 WHEELS (2 WITH BRAKE)

206188

BASKET FOR 14/15 LT FRYERS

921691

921691

CHIMNEY UPSTAND 400MM

206303

CHIMNEY UPSTAND 800MM

206304

DEFLECTOR FOR FLOURED PRODUCTS-15L FRYER

921696

921696

DOOR FOR OPEN BASE CUPBOARD-ZANUSSI

206342

206342

FILTER FOR FRYER OIL COLLECTION BASIN

921693

921693

FLANGED FEET KIT

206136

206136

FRONT.KICK.STRIP F.CONCRETE INST.1000 MM

206150

206150

FRONT.KICK.STRIP F.CONCRETE INST.1200 MM

206151

206151

FRONT.KICK.STRIP F.CONCRETE INST.1600 MM

206152

206152

FRONT.KICK.STRIP F.CONCRETE INST.400 MM

206147

FRONT.KICK.STRIP F.CONCRETE INST.800 MM

206148

206148

FRONTAL HANDRAIL 1200 MM

206191

206191

FRONTAL HANDRAIL 1600 MM

206192

206192

FRONTAL HANDRAIL 400 MM

206166

206166

FRONTAL HANDRAIL 800 MM

206167

206167

FRONTAL KICKING STRIP 1000 MM

206177

206177

FRONTAL KICKING STRIP 1200 MM

206178

206178

FRONTAL KICKING STRIP 1600 MM

206179

206179

FRONTAL KICKING STRIP 400 MM

206175

FRONTAL KICKING STRIP 800 MM

206176

206176

JUNCTION SEALING KIT

206086

206086

LARGE HANDRAIL(PORIONING SHELF)400 MM

206185

206185

LARGE HANDRAIL(PORIONING SHELF)800 MM

206186

206186

OIL DRAIN PIPE FOR 15 LT FREESTAND.FRYER

206301

206301

SEDIMENT TRAY FOR 15 LT FRYER

206235

206235

SIDE HANDRAIL-RIGHT/LEFT HAND-900 LINE

206165

206165

UNCLOGGING ROD F.15LT FRYER DRAIN.PIPE

921695

921695

WATER COLUMN WITH SWIVEL ARM

206289

206289



ISO 14001

ZANUSSI
 PROFESSIONAL

www.zanussiprofessional.com