

RANGE COMPOSITION

EVO900: a range designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected throughout the line in its modularity, construction and numerous configurations: countertop (on base or table), free-standing, on concrete or stainless steel plinth, bridged or cantilever. Thanks to its advanced technology and premium performance, EVO900 is a perfect solution for restaurants as well as large institutions needing high power and high productivity. The refrigerated base unit detailed in this sheet completes the EVO900 range and is ideal for storing food at the various cooking stages.



392163

EVO900

REFRIGERATED BASE **ZANUSSI** PROFESSIONAL

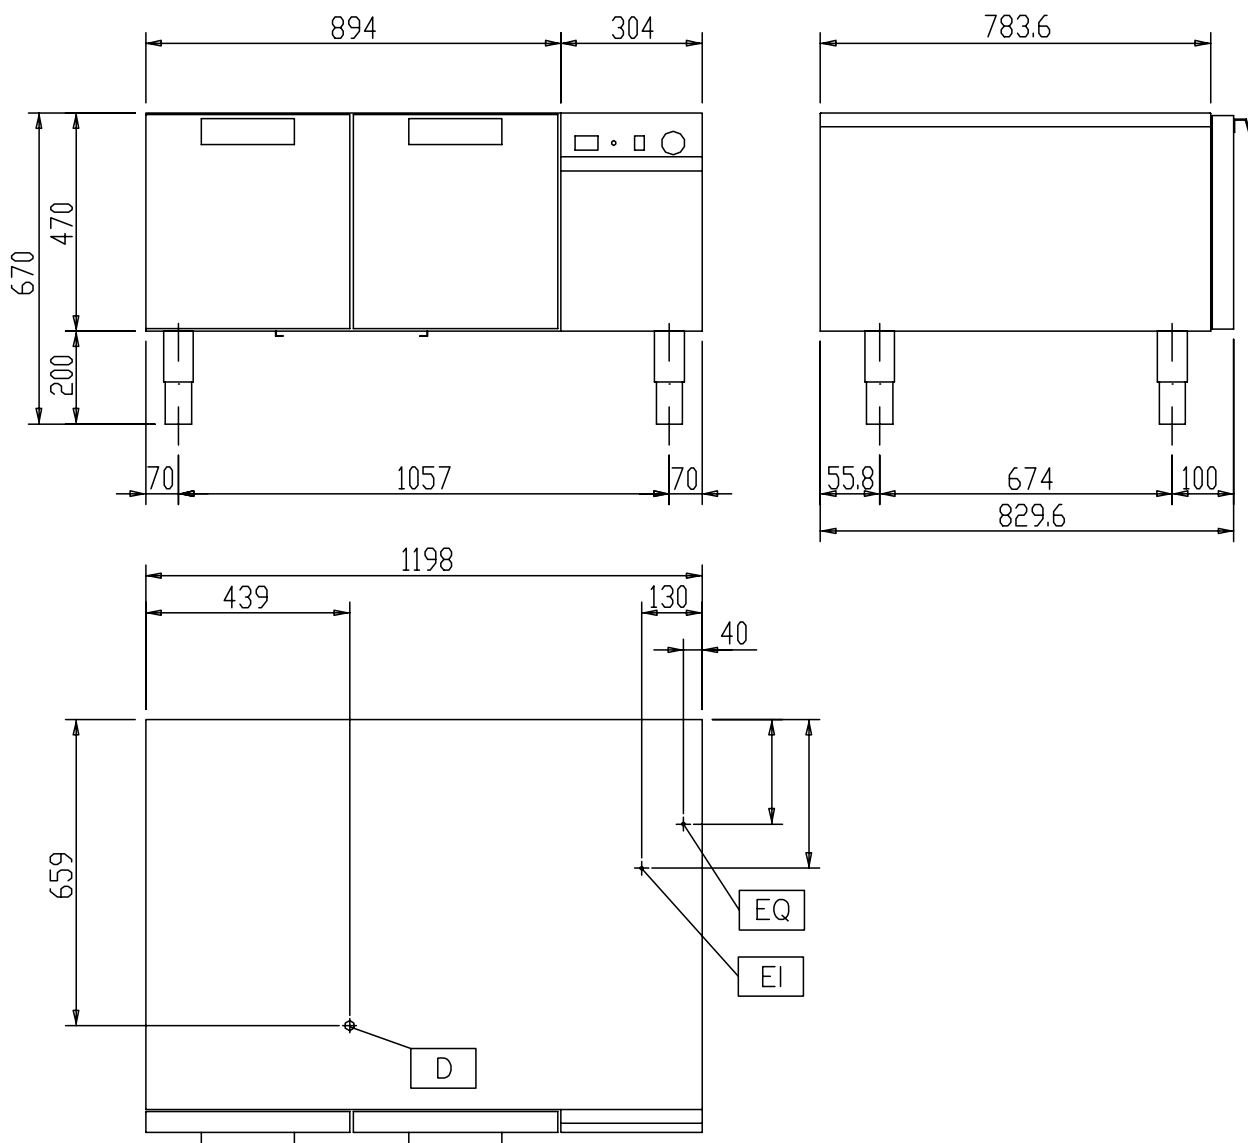
FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Front, side, rear and bottom panels in stainless steel with Scotch Brite finish.
- ◆ The refrigerated base has two large stainless steel drawers on telescopic runners, thermostat, defrost indicator light and ON/OFF switch. The internal temperature ranges from -2° to +10°C and the compressor unit is built-in.
- ◆ The two large drawers have front panels with stainless steel handles.
- ◆ Suitable for use in ambient temperatures of up to 43 °C.
- ◆ Anti-tilt runners accept GN1/1 containers.
- ◆ CFC free (ecological refrigerant type: R404a - gas in foam: cyclopentane).
- ◆ Forced air circulation for rapid cooling and an even temperature distribution.
- ◆ Feet in stainless steel 50 mm adjustables in height.

- ◆ Main connections can be accessed via the front, rear or the base of the unit.
- ◆ All top models (with the exception of gas and electric char-grills and lava char-grill tops) can be easily mounted on the refrigerated base.
- ◆ The special design of the control knobs and bezels guarantees

- against water infiltration.
- ◆ IPX5 water protection.

TECHNICAL DATA	
CHARACTERISTICS	MODELS
	Z9BAPL00R0 392163
Power supply	Electric
Gross capacity (D.I.N. 8952) - l.	225
External dimensions - mm	
width	1200
depth	900
height	600
height adjustment	50
Min/Max internal humidity - %	75/90%
N° of drawers	2
N° defrost in 24 hrs.	4/10'
Refrigerant type	R404a
Refrigerant quantity - g.	400
Refrigeration power - W	410
Power - kW	
installed-electric	0.4
Net weight - kg.	114
Supply voltage	230 V, 1N, 50

**LEGEND**

	Z9BAPL00R0 392163
D - Water drain	1/2"
EI - Electrical connection	230 V, 1N, 50

**OPTIONAL ACCESSORIES**

ACCESSORIES	MODELS
	Z9BAPL00R0 392163
FLANGED FEET KIT	206136


www.zanussiprofessional.com