

RANGE COMPOSITION

EVO900: a range designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected throughout the line in its modularity, construction and numerous configurations: countertop (on base or table), free-standing, on concrete or stainless steel plinth, bridged or cantilever. Thanks to its advanced technology and premium performance, EVO900 is a perfect solution for restaurants as well as large institutions needing high power and high productivity. The models detailed in this sheet consists of 2 gas braising pans with a capacity of 100 litres and with mild steel bottom.



392139

EVO900

GAS BRAISING PANS - 100 LT ZANUSSI PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Burners with optimized combustion, flame failure device and automatic ignition with electronic flame control are built-in to the base of the well, so they move together during tilting for better cleaning and for the highest safety conditions.
 - ◆ Working temperature (from 120°C to 300°C) controlled through a thermostat and energy input through an energy regulator.
 - ◆ Front and side panels in stainless steel with Scotch Brite finish.
 - ◆ All models have right-angled side edges to allow flush fitting between units, eliminating gaps and possible dirt traps.
 - ◆ Well and double skinned lid/worktop in stainless steel.
 - ◆ The stainless steel well features rounded corners and has a seamless weld joining the bottom plate from the rest of the well for fast, safe and easy cleaning.
 - ◆ Well cooking surface in mild steel typically indicated for "dry cooking" or "shallow frying" sautéing, poaching, steaming, boiling, stewing and regular frying.
- In order for the mild steel surface to be used for "wet cooking", it must be properly treated and maintained to prevent against corrosive foods (any food having a high amount of

acids or salt, such as tomato sauces - please refer to owners manual on procedure).

- ◆ Main connections can be via the base of the unit.
- ◆ The special design of the control knobs and bezels guarantees against water infiltration
- ◆ One control knob operating as cooking temperature regulator as well as energy control device.
- ◆ Manual tilt mechanism to facilitate the emptying of the bratt pan.


- ◆ All gas appliances are supplied for use with natural gas, with LPG conversion jets supplied as standard.
- ◆ All models can be installed on cantilever system.
- ◆ IPX5 water protection.
- ◆ Feet in stainless steel are adjustable up to 50 mm in height.


TECHNICAL DATA		
CHARACTERISTICS	MODELS	
	Z9BRGJMPPF0 392138	Z9BRGJMPPFM 392139
Power supply	Gas	Gas
External dimensions - mm		
width	1000	1000
depth	900	900
height	850	850
Cooking surface		
material	Mild Steel	Mild Steel
Thermostatic valve	●	
Maximum Well Capacity -lt	100	100
Cooking surface dimensions - mm		
width	880	880
depth	565	565
Working temperature - min/max - °C	120, 300	120, 300
Power - kW		
gas	27	27
auxiliary	0.03	0.05
Net weight - kg.	180	180
Supply voltage	230 V, 1N, 50/60	230 V, 1N, 50/60
Automatic tilting		●

OPTIONAL ACCESSORIES		
ACCESSORIES	MODELS	
	Z9BRGJMPF0 392138	Z9BRGJMPPM 392139
2 PANELS FOR SERVICE DUCT (BACK TO BACK)	206202	206202
2 PANELS FOR SERVICE DUCT (SINGLE INST.)	206181	206181
2 SIDE COVERING PANELS H=700-D=900-Z/OEM	206335	206335
2 SIDE KICKING STRIPS - 900 LINE	206180	206180
CHIMNEY UPSTAND 1000MM	206305	206305
DRAUGHT DIVERTER WITH 150 MM DIAMETER	206132	206132
FLANGED FEET KIT	206136	206136
FRONTAL HANDRAIL 1200 MM	206191	206191
FRONTAL HANDRAIL 1600 MM	206192	206192
FRONTAL HANDRAIL 400 MM	206166	206166
FRONTAL HANDRAIL 800 MM	206167	206167
FRONTAL KICKING STRIP 1000 MM	206177	206177
FRONTAL KICKING STRIP 1200 MM	206178	206178
FRONTAL KICKING STRIP 1600 MM	206179	206179
MATCHING RING FOR FLUE CONDENSER 150DIAM	206133	206133
PRESSURE REGULATOR FOR GAS UNITS	927225	927225
SIDE HANDRAIL-RIGHT/LEFT HAND-900 LINE	206165	206165



www.zanussiprofessional.com

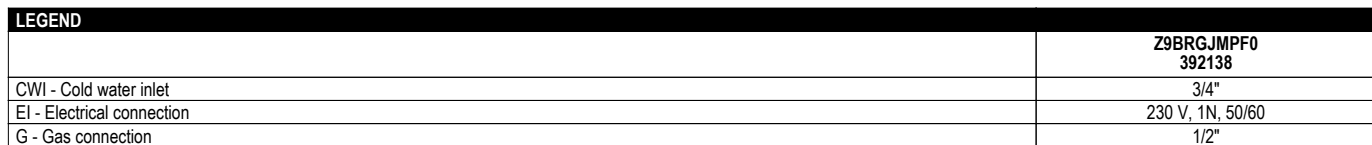

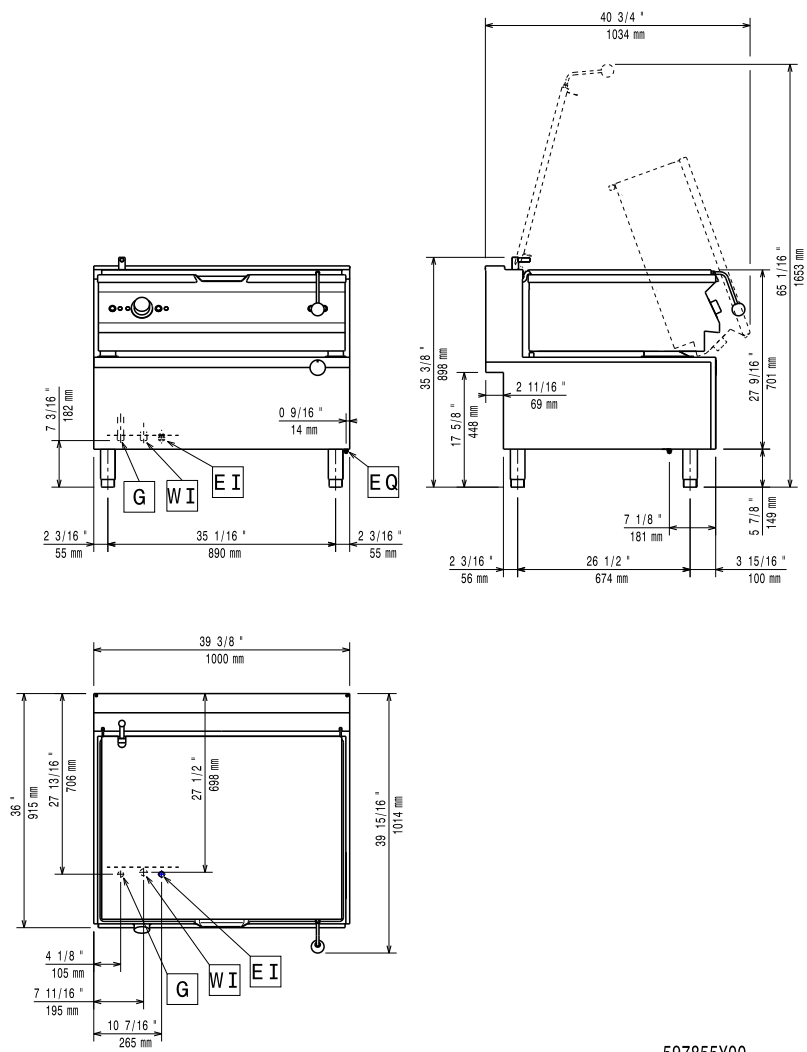

597855Y00

LEGEND

	Z9BRGJMPFM 392139
CWI - Cold water inlet	$\frac{3}{4}''$
EI - Electrical connection	230 V, 1N, 50/60
G - Gas connection	$\frac{1}{2}''$